


# INSERTER FEEDER SERIES

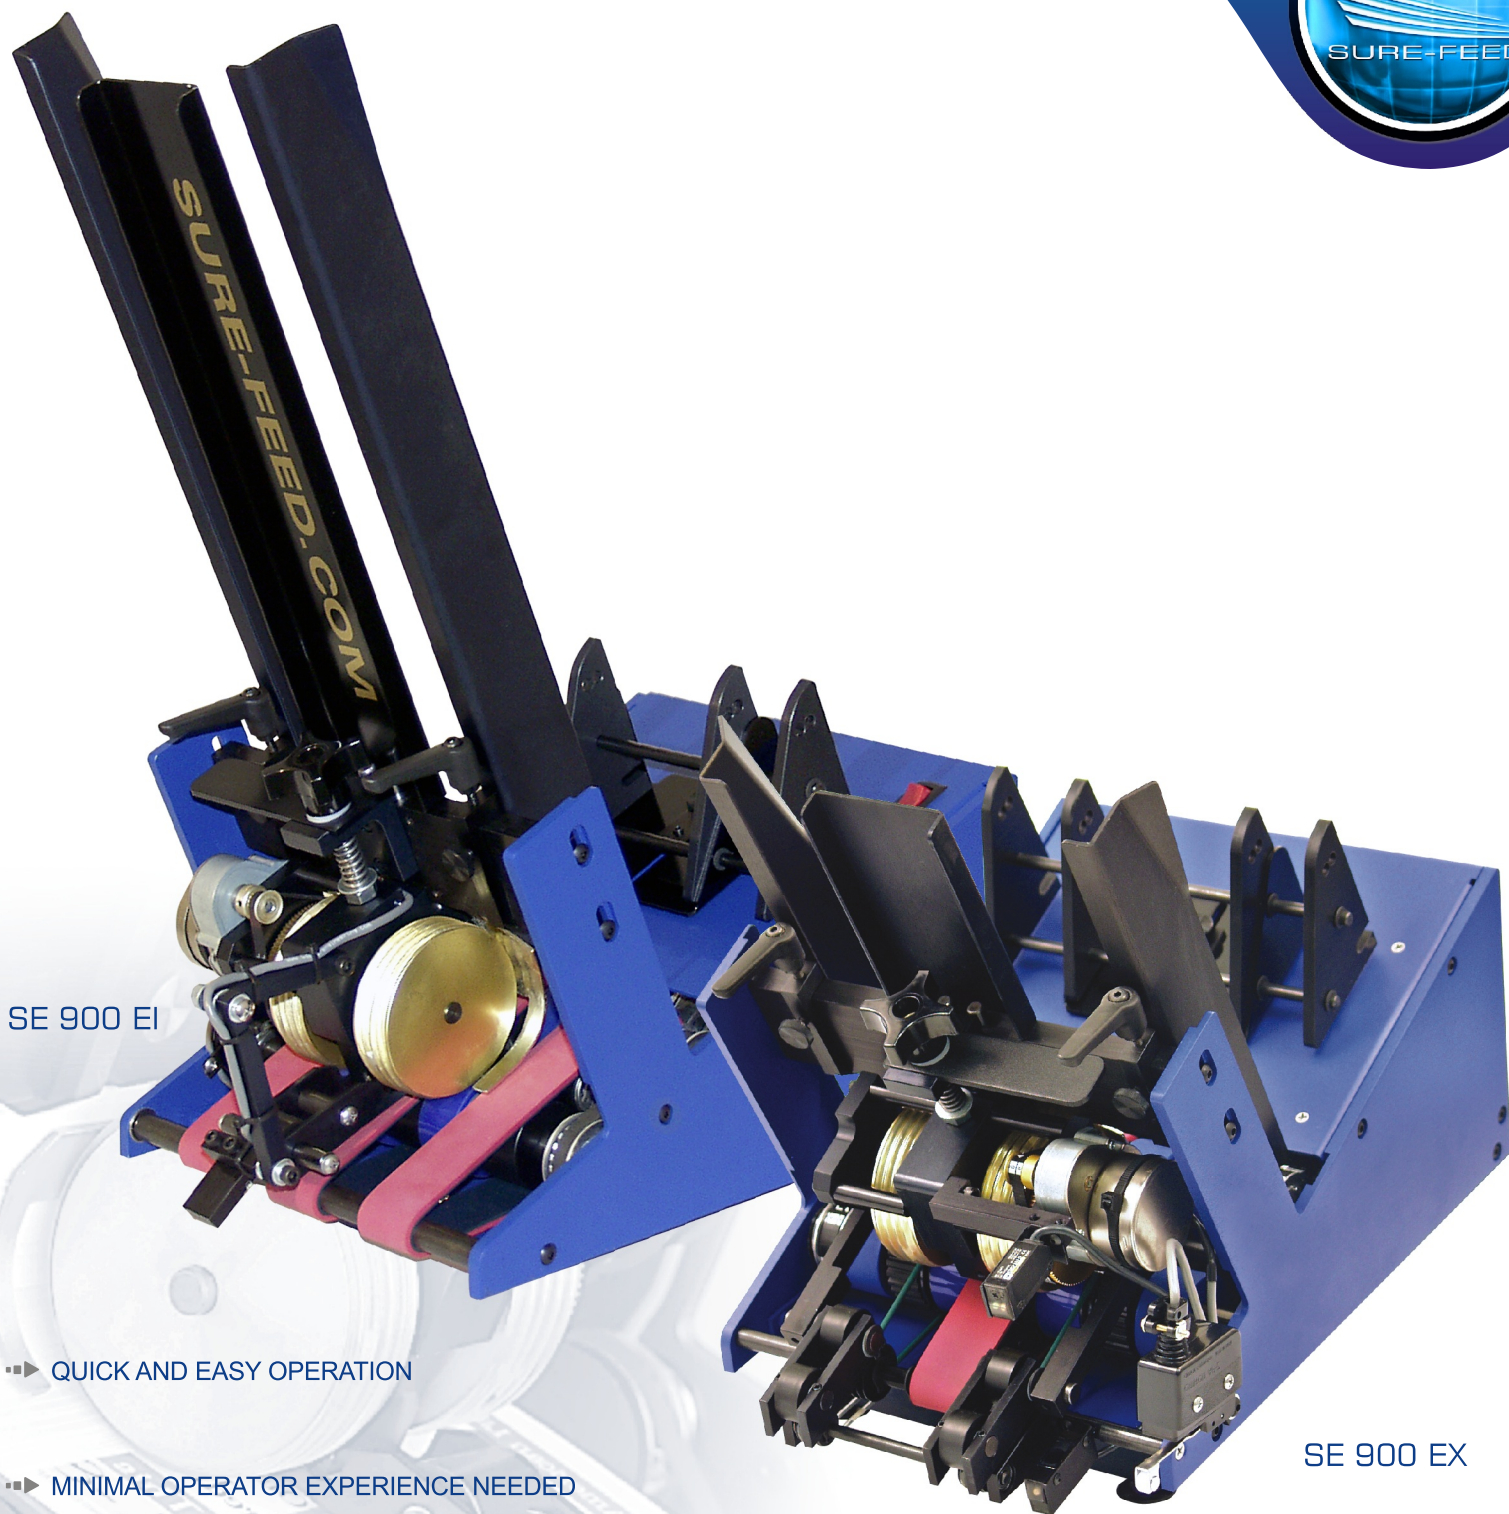

SE 900 EI

SE 900 EX

- ▶▶ QUICK AND EASY OPERATION
- ▶▶ MINIMAL OPERATOR EXPERIENCE NEEDED
- ▶▶ ADD A 7TH, 8TH OR 9TH STATION TO YOUR EXISTING INSERTER
- ▶▶ REPLACE AN EXISTING INSERTER STATION

TYPE OF UNIT: Inserter

EI - Gripper Style Inserters (6x9), Bell & Howell, Inscerco, EMC  
EX - Add on station for gripper arm inserter (operator side)

▶▶ For more information contact your authorized dealer at: 1-800-INSERTER(467-3783)

# INSERTER FEEDER

## KEY FEATURES

### DYNAMIC ROTATION TECHNOLOGY


This feature comes standard in our top of the line feeders & inserters. The Gold Separator Wheel counter rotates against the flow of material which gives the separator o-rings even wear and no "flat spots". The large diameter makes for a perfect pre-shingle prior to the nip point.

### PRODUCT GUIDES

Keeps product uniform.

### HEAVY DUTY FEEDER BODY

1/4" powder coated feeder body construction ensures strength and durability.

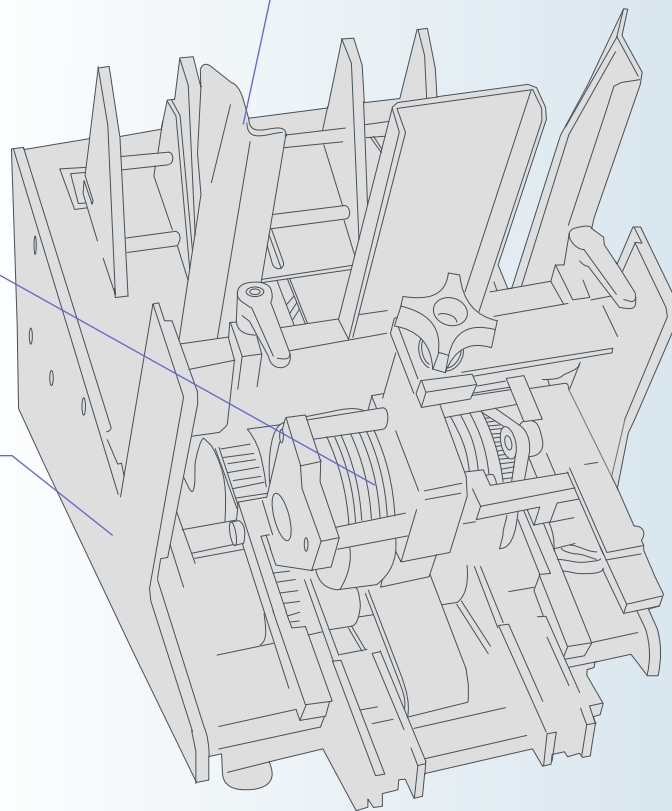

visit us on the worldwide web at :www.sure-feed.com



## OPTIONS


- EI - Select On Demand
- EX - Batch Count, Double Detection, Select On Demand Batch Interrupt

## TECHNICAL SPECIFICATIONS

	SE 900 EI ECO 900 EI	SE 1200 EI ECO 1200 EI	SE 900 EX
Product Size Maximum	W-9.125" x L-9"	W-11.5" x L-12"	W-9.125" x L-5.5"
Product Size Minimum	W-2.5" x L-2"	W-2.5" x L-3"	W-5" x L-3"
Product Thickness Maximum	.75"	.75"	.25"
Product Thickness Minimum	.002"	.002"	.002"
Presentation Sensor	Standard	Standard	N/A
Sleep Mode	Standard	Standard	Standard
Double Detection	N/A	N/A	Optional
Select On Demand	Optional	Optional	Optional
Feeder Capacity	20" Vertical	20" Vertical	10" Vertical/ 20" optional hopper
Batch Count	N/A	N/A	Optional
Electrical	120VAC / 240VAC	120VAC / 240VAC	120VAC / 240VAC
Speed	Variable 20 to 320 Feet/Min	Variable 20 to 320 Feet/Min	Variable 20 to 320 Feet/Min
Drive Motor	Variable DC	Variable DC	Variable DC
Warranty	2 YEAR LIMITED		

All Specifications are subject to change.

## SPECIFICATIONS & APPLICATIONS

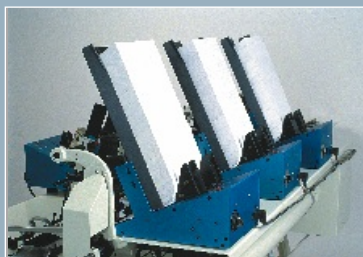

Replace all of the inserter vacuum stations with friction feeders.

### Replace-A-Station

The EI Model feeders are designed to fit on the back of your inserter to replace the vacuum suction cup method. The EI feeder comes in two models: the 900EI to replace stations on 6x9 inserters and the 1200EI to replace stations on 9x12 inserters. These feeders are compatible with Bell & Howell™, Mailcrafter™, EMC™ or Pitney Bowes™ swing arm inserters.



Feeder timing controlled by holding down ski arm triggering micro-switch.

### Add-A-Station

The EX Series Feeder is designed to clamp on the front table of most inserters, which adds extra stations to your existing machine. Quickly turning your 6-station inserter into a 7, 8 or 9 station. For those with a 12-station inserter, you can expand up to a 20 station. Adding stations to the operator side provides easier access for the operator and saves on space. The 900 EX sits across from a station and ejects an insert into the track underneath the jaw of the opposing pocket. Variable speed control and miss detection are standard features. Double detection, batch counting and delay/interrupt are optional features.

simply innovative

## SURE-FEED ENGINEERING

12050 49th STREET NORTH, CLEARWATER FL. 33762-4301  
PHONE: 727.571.3330 FAX: 727.571.3443 TOLL FREE: 1.800.INSERTER

visit us on the worldwide web at :www.sure-feed.com  
e-mail: sales@sure-feed.com

