


AN INNOVATIVE TABBING AND LABELING SYSTEM FROM AN INNOVATIVE COMPANY

THE BK 730 INTEGRATES WITH
VIRTUALLY ANY MAIL TRANSPORT,
BINDERY OR FINISHING SYSTEMS

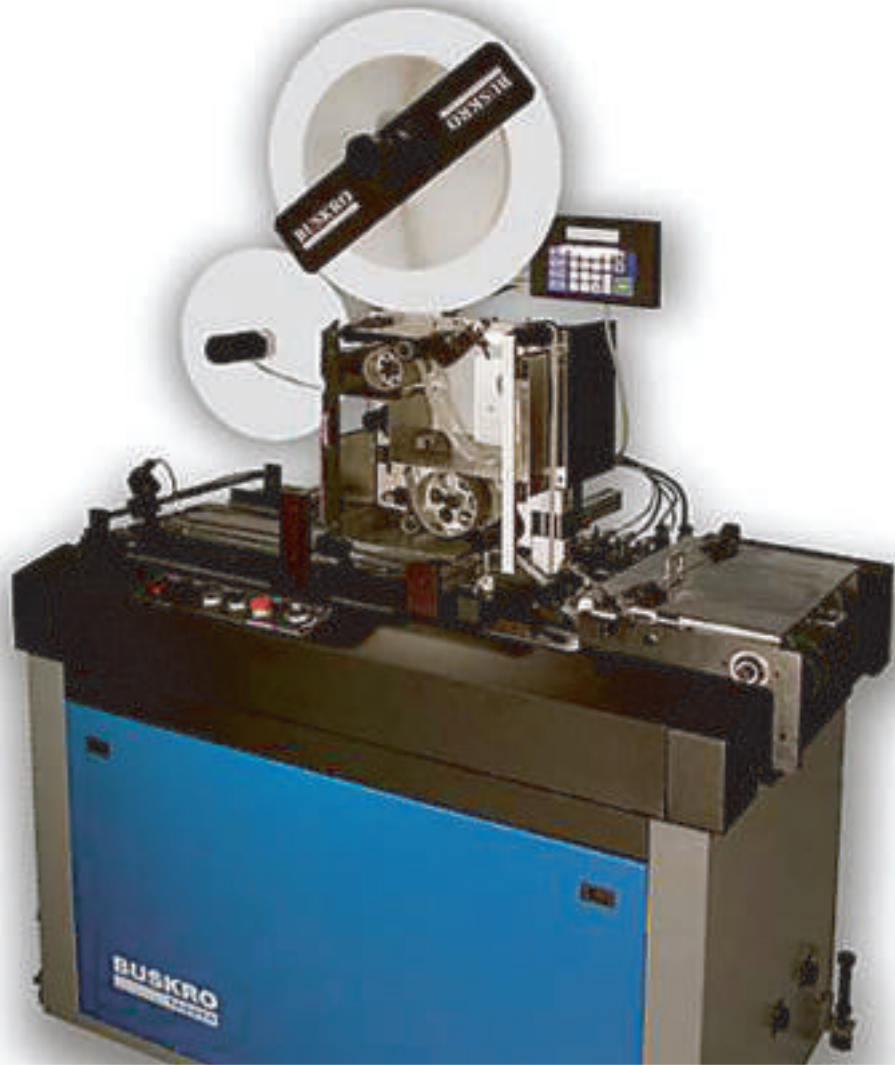

FEATURES

- Super-fast, easy setup and changeover
- Automatic controls eliminate guesswork
- Apply labels and tabs up to 7" (178mm) long
- Portability: self-contained controls in the tabbing head
- Placement accuracy at high speeds, up to 35,000 pph for single tabs (up to 1")
- Modular designs lets you place the tabber/labeler at any point in the production line
- Automatic backer sensing
- Production counters and displays
- Error reporting

MODELS

- BK730 for labels up to 3" (76mm) wide
- BK730WL (Wide Label) for labels up to 5" (127mm) wide

BK730 & BK730WL

TABBING & LABELING SYSTEMS

Automatic Setup for Maximum Efficiency

Gain extra production time and increase profits with a tabbing and labeling system that delivers faster, easier setup and changeovers, along with a tighter wrap and accurate placement.

Simply enter the piece length, number of tabs, type of tabs and relax. The BK730 system automatically sets the label pitch, backer sensitivity, and label placement – no guesswork required!

BUSKRO
Built for today | Designed for tomorrow

THE BUSKRO TABBER/LABELER INTEGRATES WITH VIRTUALLY ANY MAIL TRANSPORT, BINDERY OR FINISHING SYSTEMS

FOR VIRTUALLY UNLIMITED
CREATIVE FREEDOM IN TABBING
AND LABELING APPLICATIONS

Our tabbing heads automate almost every tabbing and labeling process, saving you considerable time and money, and giving you virtually unlimited creative freedom in tabbing and labeling applications on materials up to 1 1/8" thick. Always on the cutting edge, Buskro leads the way with the wide label BK730WL, still the industry standard in tabbing and labeling.

- High quality
- Easy to use
- Affordable
- Durable and dependable
- Flexible and upgradeable

All Buskro products feature heavy-duty construction from top to bottom, as well as design details that promote years of trouble-free operation.

For more information on these Tabber/Labelers, other inkjet mail and print solutions, and Buskro product information, service and support, visit www.buskro.com or call a Buskro application specialist today!


www.buskro.com
BUSKRO
Built for today | Designed for tomorrow

BASE

Product Handling	Minimum	3 x 5" (76 x 127mm)
	Maximum	16 x 17" (406 x 432mm)
	Thickness	Single sheet to 5/8" (16 mm)
Physical	Overall height including tabber head	72" to 74" (1826 to 1882 mm)
	Height to tabletop	34.3 to 36.5" (871 to 927mm)
	Overall width	28" (711mm)
Production Rate (Based on 9.5" Piece)	Belt speed	0 to 600 ft/min (0 to 3 m/s)
	Single tabs	0 to 35,000 pph
	Double tabs	0 to 30,000 pph
	Triple tabs	0 to 28,000 pph
Electrical Requirements	Line voltage	115 ± 10% VAC (Europe: 230 ± 10% VAC)
	Line current	5 Amps (Europe: 2.5 Amps)
	Power	575 VA

PORTABLE HEAD

Models	BK730	BK730WL	
Tab Specifications	Width	Up to 3" (76mm)	Up to 5" (127mm)
	Length	0.5 to 7" (13 to 178mm)	
	Number of tabs/piece	1, 2, or 3	
	Rolls size	Up to 50,000 (based on 3/4" tabs)	
	Core diameter	3" (76mm)	
	Spool size (max)	19.75" (502mm)	
	Substrate	Clear, paper, translucent	
	Placement	Left, right, or flat tab	
Physical	Length c/w unwind & rewind spools	32.2" (818mm)	
	Height c/w unwind & rewind spools	37.6" (955mm)	
	Overall width	14.1" (358mm)	



Corporate Office

Buskro Ltd.
1738 Orangebrook Court
Pickering,
Ontario L1W 3G8
Canada
Tel: 905 839 6018
Fax: 905 839 6023
canadasales@buskro.com

International Office

Buskro Global Ltd.
Charnic Business Centre
Spring Garden Highway
St. Michael 11154
Barbados
Tel: 246 426 3817
Fax: 246 426 3829
sales@buskro.com

US Office

Buskro USA Ltd.
215 Southport Drive, Suite 300
Morrisville, NC 27560
USA
Toll Free Tel: 888 8buskro
Tel: 919 439 3300
Fax: 919 462 1185
ussales@buskro.com

UK Office

Buskro UK Ltd
1 Le Flaive Business Park
Church Lane, Naphill
High Wycombe HP14 4US
United Kingdom
Tel: 44 (0) 1494 565612
Fax: 44 (0) 1494 565641
uksales@buskro.com